arXiv:0806.0401v1 [physics.plasm-ph] 2 Jun 2008

Monte Carlo Simulations of Ion Transport Including Thermal Collisions: Collision Frequency Calculation and Benchmark Results

Zoran Ristivojevic
Institute of Physics Belgrade, PO Box 68, 11080 Zemun, Belgrade, Serbia and
Institut für Theoretische Physik, Universität zu Köln, Zülpicher Str. 77,D-50937 Köln, Germany

Zoran Lj. Petrović*
Institute of Physics Belgrade, PO Box 68, 11080 Zemun, Belgrade, Serbia

(Dated: June 2, 2008)

We have derived exact analytical formulas for piecewise calculation of collision frequency integrals for low energy ion transport in a background gas and in a mixture of background gases. These calculations are required for Monte Carlo simulations of ion transport and hybrid models of non equilibrium plasmas. The range of energies where it is necessary to apply this technique has been defined. Our calculations for the transport of ions in a model gas having a constant cross section are in excellent agreement with the benchmark data from accurate solutions to the Boltzmann equation. Benchmark calculations for ion motion in hot background argon are also given.

PACS numbers: 52.20.Hv, 52.25.Fi, 52.65.Pp, 52.80.Dy, 51.50.+v

I. INTRODUCTION

Non equilibrium plasmas are used in a broad range of applications ranging from plasma etching [1, 2, 3, 4, 5, 6, 7], plasma displays [8, 9, 10, 11], to biomedical applications [12, 13] and nanotechnologies [14, 15, 16, 17]. Recently, microdischarges have become a popular target for studies and development of new applications [18, 19, 20, 21] of non-equilibrium plasmas. Development of devices based on non-equilibrium plasmas is quite expensive and cannot be based on empirical methods so predictive accurate models had to be developed [6, 22, 23].

Ion transport coefficients are used in both fluid and hybrid models of plasmas [6, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33] relevant for the applications mentioned above. Indirectly transport coefficients are used to verify the completeness and the absolute magnitude of the cross sections in the sets [6, 24] that are to be used in Monte Carlo and Particle in Cell (PIC) models of plasmas [34, 35]. There is a critical shortage of data for most ions in most gases that are interesting for applications [36]. In addition, there is a pressing need to have both accurate and efficient algorithms for simulation of ion motion. For example, even in hybrid models, that were developed to take into account the non-local transport of electrons, more and more frequently ions and even fast neutrals are treated by a Monte Carlo technique [32, 37, 38, 39].

In calculation of ion properties in a neutral background gas with Monte Carlo simulation [40] or momentum transfer theory [41], it is very often assumed that the particles of the neutral gas are at rest. It is a reasonable approximation when the mean ion energy exceeds gas thermal energy by a large factor. This approximation is, however, not valid for low electric fields, when the mean ion energy is comparable to the thermal energy of the background gas. In such a case collision frequency has to be calculated more accurately, based on relative velocity that takes into account the thermal motion of gas particles.

Collision frequency for a test ion particle of velocity v in a neutral, background, gas is

$$\nu(v) = n \iiint \sigma\left(|\mathbf{v}-\mathbf{u}|\right)|\mathbf{v}-\mathbf{u}|F(\mathbf{u})\mathrm{d}\mathbf{u}, \qquad (1)$$

where n is the neutral gas density, $F(\mathbf{u})$ is the gas velocity distribution function and $\sigma\left(|\mathbf{v}-\mathbf{u}|\right)$ is the cross section for ion-neutral scattering as a function of relative velocity. Having in mind that collision frequency should be calculated for many different ion velocities v, one needs to be able to calculate (1) very efficiently. In addition, one should be aware that ions have thermal energies for a very wide range of reduced fields covering most practical discharges.

Different approaches to calculation of the collision frequency can be found in the literature. In [42] calculation of the integral in (1) is performed by numerical integration using a Monte Carlo technique. While being potentially accurate, this technique is not a very efficient algorithm. Here, accuracy could be improved at the expense of the efficiency. Another approach is proposed in [43] where authors define the mean relative velocity, taking the cross section outside the integral in (1). Then they approximate the cross section by a cross section taken for that mean velocity. In this paper we have set out to find a more accurate yet still sufficiently efficient algorithm which may be used for Monte Carlo simulations of a quasi thermal ion (and electron) motion. In doing so we should remember that most cross sections are defined numerically at a limited number of points and that linear interpolation between those points is often used. Using the proposed algorithm we have also proposed bench-

---

*Electronic address: zoran@phy.bg.ac.yu

mark calculations for ion motion in their parent gas at non-zero temperatures.

After introduction, in section II we derive and analyse an explicit expression for collision frequency. Also we give an asymptotic formula for collision frequency which is valid for large ion velocities with respect to the background gas thermal velocity. In section III we emphasise a proper way of sampling velocities of the background gas and propose rejection methods which depend on the cross section. Section IV deals with mixtures of gases. Numerical results, comparison with other data and possible benchmark results are given in section V which is followed by conclusions.

II. THEORY

Explicit calculation of (1) is possible for specific cross sections and gas velocity distribution functions. We will assume that the background gas is in equilibrium at the temperature T, so it may be described by a Maxwellian velocity distribution function (MVDF). Introducing (the most probable) gas thermal velocity $w = (2kT/M)^{1/2}$, where M is the mass of gas molecules and k is the Boltzmann constant and after integration over solid angles, expression (1) can be transformed to

$$\nu(v) = \frac{n}{\sqrt{\pi} w v} \int_0^{+\infty} \sigma(x) x^2 \Bigg(\exp\left[-\frac{(x-v)^2}{w^2}\right] - \exp\left[-\frac{(x+v)^2}{w^2}\right] \Bigg) \mathrm{d}x. \quad (2)$$

This expression is valid only for non-zero velocities of the ion. A similar expression can be derived for the ion velocity equal to zero, but this case is rarely encountered and will not be considered explicitly here. Alternatively, one can determine $\nu(0)$ as the limiting case $v \to 0$ of (2).

It is possible to convert the integral of the type (2), to give the following expression for the collision frequency when ion velocities are much greater than the thermal gas velocity (see appendix for details):

$$\nu(v) = n\sigma(v)v \left(1 + \frac{w^2}{v^2}\frac{(v^2\sigma(v))''}{4\sigma(v)} + \dots\right) \quad (3)$$

We see that the first order correction is proportional to the square of the ratio w/v. Collision frequency for the cold gas is a special case $w = 0$ of (3):

$$\nu(v) = n\sigma(v)v. \quad (4)$$

This formula is very widely used in Monte Carlo simulations, for example in [40, 44, 45] even though it is not applicable at low ion energies.

For further calculations of (2) we need a specific form of the cross section. Real cross sections are always tabulated as a function of incident ion energies (or velocities) or relative energies (velocities). In principle it could be argued that the cross sections are often tabulated as constant values in narrow energy bins so the solution for a constant cross section may be sufficient. However in the low energy limit the cross sections are often increasing rapidly and application of a constant cross section may require application of a large number of energy bins. At the same time usually the data for low energy limit of mobilities is available and thus one needs accurate and efficient schemes for calculation in this energy range. Thus we assume that the cross section, given as a function of the relative ion-neutral velocity x, may be expressed as

$$\sigma(x) = \begin{cases} a_1^2\left(\frac{x}{v}\right)^2 + a_1^1\left(\frac{x}{v}\right) + a_1^0, & 0 \le x \le x_1 \\ a_2^2\left(\frac{x}{v}\right)^2 + a_2^1\left(\frac{x}{v}\right) + a_2^0, & x_1 \le x \le x_2 \\ \vdots & \vdots \\ a_i^2\left(\frac{x}{v}\right)^2 + a_i^1\left(\frac{x}{v}\right) + a_i^0, & x_{i-1} \le x \le x_i \\ \vdots & \vdots \end{cases} \quad (5)$$

Taking into account (5) we can define integrals which originate in (2) as:

$$I_m^{\pm}(v, w, x_0, x_1) = \int_{x_0}^{x_1} \frac{x^{2+m}}{\sqrt{\pi} w v^{2+m}} \exp\left[-\frac{(x \pm v)^2}{w^2}\right] \mathrm{d}x, \quad (6)$$

with $m = 0, 1, 2$. These integrals may be calculated analytically, and in terms of variables $a_i^{\pm} = \frac{x_i \pm v}{w}$ are:

$$I_0^{\pm}(v, w, x_0, x_1) = \frac{1}{4}\left(2 + \frac{w^2}{v^2}\right)\left(\mathrm{erf}[a_1^{\pm}] - \mathrm{erf}[a_0^{\pm}]\right) + \frac{1}{2\sqrt{\pi}}\frac{w^2}{v^2}\left(a_0^{\mp}\exp[-a_0^{\pm 2}] - a_1^{\mp}\exp[-a_1^{\pm 2}]\right), \quad (7)$$

$$I_1^{\pm}(v, w, x_0, x_1) = \mp\frac{1}{4}\left(2 + 3\frac{w^2}{v^2}\right)\left(\mathrm{erf}[a_1^{\pm}] - \mathrm{erf}[a_0^{\pm}]\right) + \frac{1}{2\sqrt{\pi}}\exp[-a_0^{\pm 2}]\left(3\frac{w}{v} \mp 3\frac{w^2}{v^2}a_0^{\pm} + \frac{w^3}{v^3}\left(1 + a_0^{\pm 2}\right)\right) - \frac{1}{2\sqrt{\pi}}\exp[-a_1^{\pm 2}]\left(3\frac{w}{v} \mp 3\frac{w^2}{v^2}a_1^{\pm} + \frac{w^3}{v^3}\left(1 + a_1^{\pm 2}\right)\right), \quad (8)$$

$$\begin{aligned} I_2^{\pm}(v,w,x_0,x_1) = \frac{1}{8}\left(4+12\frac{w^2}{v^2}+3\frac{w^4}{v^4}\right)\left(\mathrm{erf}[a_1^{\pm}]-\mathrm{erf}[a_0^{\pm}]\right) \\ +\frac{1}{4\sqrt{\pi}}\exp[-a_0^{\pm 2}]\Big(\mp 8\frac{w}{v}+12\frac{w^2}{v^2}a_0^{\pm}\mp 8\frac{w^3}{v^3}\left(1+a_0^{\pm 2}\right)+\frac{w^4}{v^4}a_0^{\pm}\left(3+2a_0^{\pm 2}\right)\Big) \\ -\frac{1}{4\sqrt{\pi}}\exp[-a_1^{\pm 2}]\Big(\mp 8\frac{w}{v}+12\frac{w^2}{v^2}a_1^{\pm}\mp 8\frac{w^3}{v^3}\left(1+a_1^{\pm 2}\right)+\frac{w^4}{v^4}a_1^{\pm}\left(3+2a_1^{\pm 2}\right)\Big). \quad (9) \end{aligned}$$

Now, the collision frequency (2) can be easily calculated as

$$\nu(v)=\sum_{m=0}^{2}\sum_{i=0}^{\infty} n v a_i^m \left(I_m^-(v,w,x_i,x_{i+1})-I_m^+(v,w,x_i,x_{i+1})\right). \quad (10)$$

We notice that this sum is made over all values of the index i, i.e. for all relative velocities x, but in practicalapplications the situation is different. Integrals (6) are homogenous functions of their arguments of the order zero, and we will now consider some of their general properties. Under conditions

$$v \geq 6w, \quad x_0 = 0, \quad x_1 = \infty \quad (11)$$

the integrals satisfy

$$I_0^+,\ I_1^+,\ I_2^+ < 10^{-20}, \quad (12)$$

$$I_0^-,\ I_1^-,\ I_2^- \approx 1. \quad (13)$$

Also, under conditions

$$v \geq 6w, \quad x_0 \geq v+6w, \quad x_1 \geq x_0 \quad (14)$$

the integrals satisfy

$$I_0^-,\ I_1^-,\ I_2^- < 2\cdot 10^{-16}. \quad (15)$$

Or in other words as v increases the integrals decrease very rapidly.

When we work with a computer with double precision, machine accuracy is $\epsilon_m \sim 10^{-16}$, so for a given ion velocity $v \geq 6w$, it is enough to integrate over the relative velocities up to $v+6w$. Moreover, because of (12) and (13) expansion (3) converges very rapidly.

For ion velocities which are less than $6w$ similar consideration can be made. One can conclude, taking into account computer with a double precision, that the upper limit for integration in (6) should be at most $12w$.

A. Constant cross section

For a constant cross section σ_0, from (2), (5) and (7) we obtain the collision frequency for the hard sphere scattering (which was previously found and used in [46]):

$$\nu(v)=n\sigma_0 w\left(\left(\frac{v}{w}+\frac{w}{2v}\right)\mathrm{erf}\left[\frac{v}{w}\right]+\frac{1}{\sqrt{\pi}}\exp\left[-\left(\frac{v}{w}\right)^2\right]\right). \quad (16)$$

From (3) we see that the collision frequency for a small ratio w/v (16) may be approximated by

$$\nu(v)=n\sigma_0 v\left(1+\frac{w^2}{2v^2}\right). \quad (17)$$

One can notice that, according to (3), in the case of a constant cross section, only the correction of the first order exists. Relative difference between the last two formulas for the case $v \geq 6w$ is less than machine accuracy ϵ_m and these formulas are represented by the same number in the computer register.

B. Realistic cross sections

Calculations of the collision frequency are also done for a real cross section [47] for Ar^+ ions in their parent gas. In Fig. 1 we show the collision frequency calculated by different methods. Exact solution and calculation by the equation 10 are essentially identical on the scale of the Figure. We can see that approximate formula from [43] should be improved further, as well as formula for the cold gas approximation. Also we can see that the analytic correction in (3), (which is included for $v > 2w$ in Fig. (1)) fits the exact formula very well. Relative difference between the exact formula (2) and formula (3) is less than $1.3\cdot 10^{-3}$ for $v > 2w$, and less than $7.2\cdot 10^{-6}$ for $v > 6w$. Having in mind that relative difference between the exact formula and the cold gas approximation (4) even at $v = 18w$ is greater than 10^{-3} and increases with decreasing v we may conclude that corrected form of calculation is necessary. For large v/w limit and in order to save the computational time the analytic form (3) of the correction term is very useful and sufficiently accurate for all practical purposes.

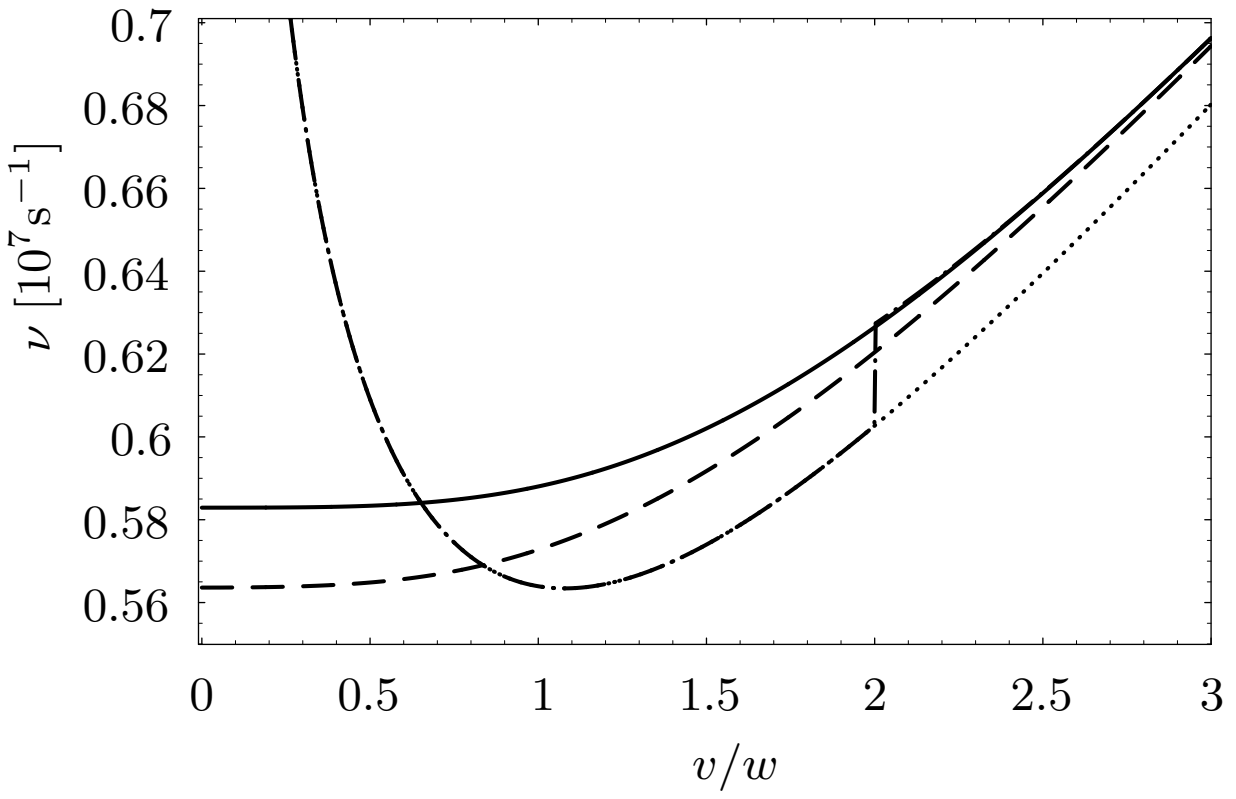

FIG. 1: Collision frequency for Ar^+ ions in their parent gas for a cross sections from [47] for the parameter $m = 2$. Gas density was $n = 10^{22}$ m^{-3} and temperature $T = 77$ K. Solid line is calculated using exact formula (2) or (10), dashed line using the formula from [43], dash–dotted by using (3) with inclusion of the correction terms after $2w$, while the dotted curve is determined from the cold gas approximation (4).

III. GAS VELOCITY DISTRIBUTION IN COLLISIONS WITH IONS

When ion collides with gas, a special attention must be paid to statistical properties of gas particles which collide with that ion. Naively, one would think that statistical properties of gas particles which collide with an ion of a given velocity, are independent of that velocity and of the cross section.

It has been customary in the literature [45, 48] to sample gas velocities directly from the gas velocity distribution function for their Monte Carlo simulations. This may lead to some inaccuracy especially for small energies of particles.

In that case they do not determine the distribution function of the collision probability (frequency) properly, as required in (1). In other words the time between two collisions is determined by the probability density for collisions which involves distribution function of the gas particles but it should be modified to include the relative velocity dependence of the cross section.

The error in sampling velocities from the gas velocity distribution function and applying them in the collision frequency may be small or may be compensated by other considerations but in that case one is never sure just how big the uncertainty is and whether it may become important under some circumstances. We will see latter that such procedure will lead to results that are obviously wrong (see Fig. 4).

While most authors use cold gas approximation and study mainly higher energies some authors have attempted to obtain a more accurate method of calculation of the distribution function of collision frequency in their calculations [42, 43, 46].

The probability density per unit time for collision of ion of velocity $\mathbf{v}$ with gas of velocity $\mathbf{u}$ is given by:

$$p(\mathbf{v},\mathbf{u}) = \frac{n\sigma\left(|\mathbf{v}-\mathbf{u}|\right)|\mathbf{v}-\mathbf{u}|F(\mathbf{u})}{\nu(v)}, \qquad (18)$$

where $F(\mathbf{u})$ is the gas velocity distribution function and $\nu(v)$ is the collision frequency, previously defined in (1). This is a conditional probability. We have ion of velocity v and we want velocity distribution of gas particles which collide with that ion.

Randomly chosen gas velocity should be obtained from equation (18). Method of gas velocity sampling from (18) depends on the shape of the cross section. One way to do it is to use the rejection method [49] which is easy for implementation, but often it is not efficient. Nevertheless, it is very hard to develop an efficient and quite general method for sampling of a wide range of shapes of the cross sections so the rejection method is very often a method of choice.

Two different implementations of the rejection method for (18) are obvious. Let q_{max} be the maximum of $\sigma\left(|\mathbf{v}-\mathbf{u}|\right)|\mathbf{v}-\mathbf{u}|$ for all allowed $\mathbf{v}$ and $\mathbf{u}$ (which are specified in the beginning of simulation). This maximum can be chosen as

$$q_{max} = \sqrt{27w^2+6vw+v^2}\cdot \max_{\mathbf{v},\mathbf{u}}\sigma\left(|\mathbf{v}-\mathbf{u}|\right). \qquad (19)$$

Sampled velocity $\mathbf{u}'$ from the MVDF is accepted as the background velocity if

$$\sigma\left(|\mathbf{v}-\mathbf{u}'|\right)|\mathbf{v}-\mathbf{u}'| > r q_{max} \qquad (20)$$

is fulfilled (r is uniform random number from $(0,1]$); otherwise we sample another velocity from the MVDF until the condition (20) becomes fulfilled. This method is good when the cross section resembles a constant cross section and does not have sharp maxima. On the other hand, when the cross section has a sharp maximum for a very narrow interval of velocities (e. g. $\sigma(v) \sim 1/v$), previous method is very inefficient and we may use another estimation of q_{max} simply as $\max_{\mathbf{v}_r}\sigma(\mathbf{v}_r)v_r$, where v_r goes over all allowed relative velocities (which are specified at the beginning of simulation).

A. Constant cross section

In the case of a constant cross section σ_0 expression (18) can be integrated analytically, and the probability density per unit time for collision of ion of velocity v with gas of velocity u is:

$$p_<(v,u) = \frac{n\sigma_0}{\nu(v)}\frac{4}{3\sqrt{\pi}}\exp\left[-\frac{u^2}{w^2}\right]\frac{u}{w}\left(3\frac{u^2}{w^2}+\frac{v^2}{w^2}\right), \qquad (21)$$

$$p_>(v,u) = \frac{n\sigma_0}{\nu(v)}\frac{4w}{3\sqrt{\pi}v}\exp\left[-\frac{u^2}{w^2}\right]\frac{u^2}{w^2}\left(\frac{u^2}{w^2}+3\frac{v^2}{w^2}\right), \qquad (22)$$

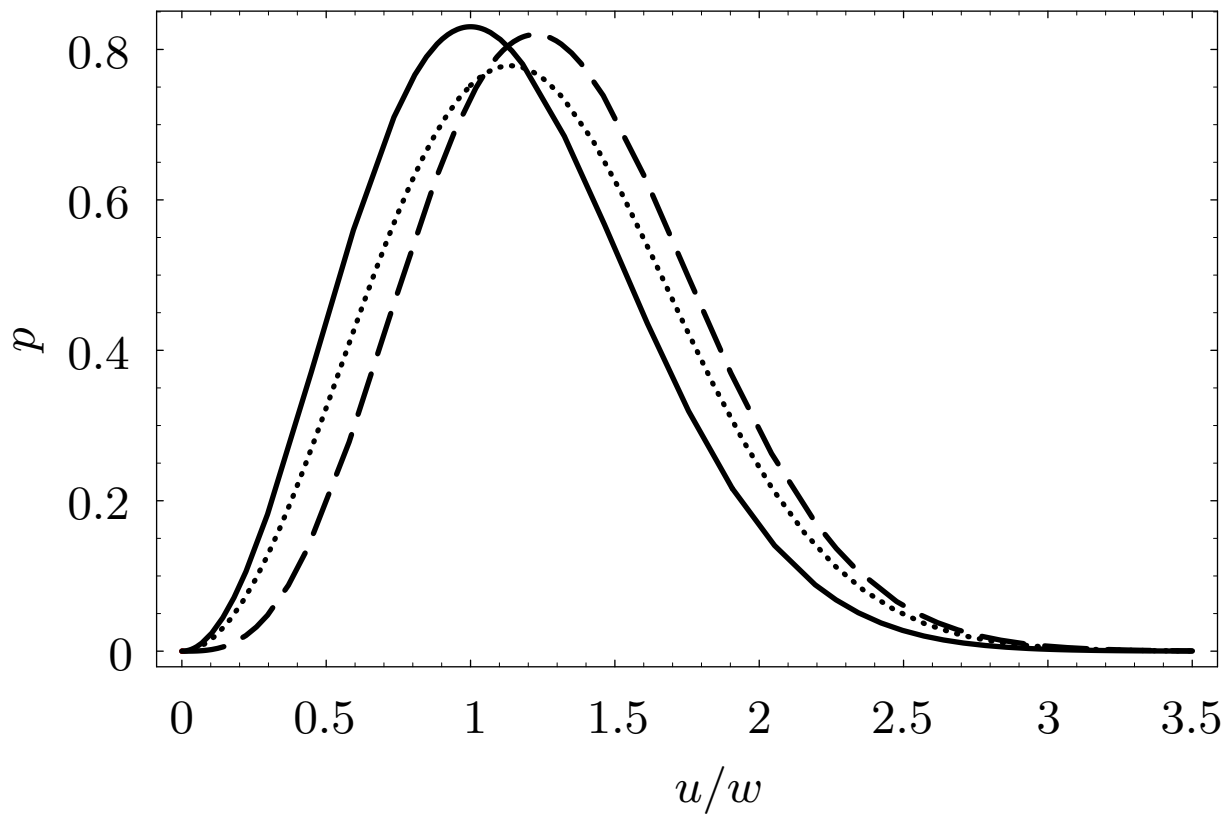

FIG. 2: Probability density of the sampled gas velocity u: the case $v = 0$ is shown by a dashed line, the case $v = w$ is shown by a dotted line. MVDF is represented by a solid line.

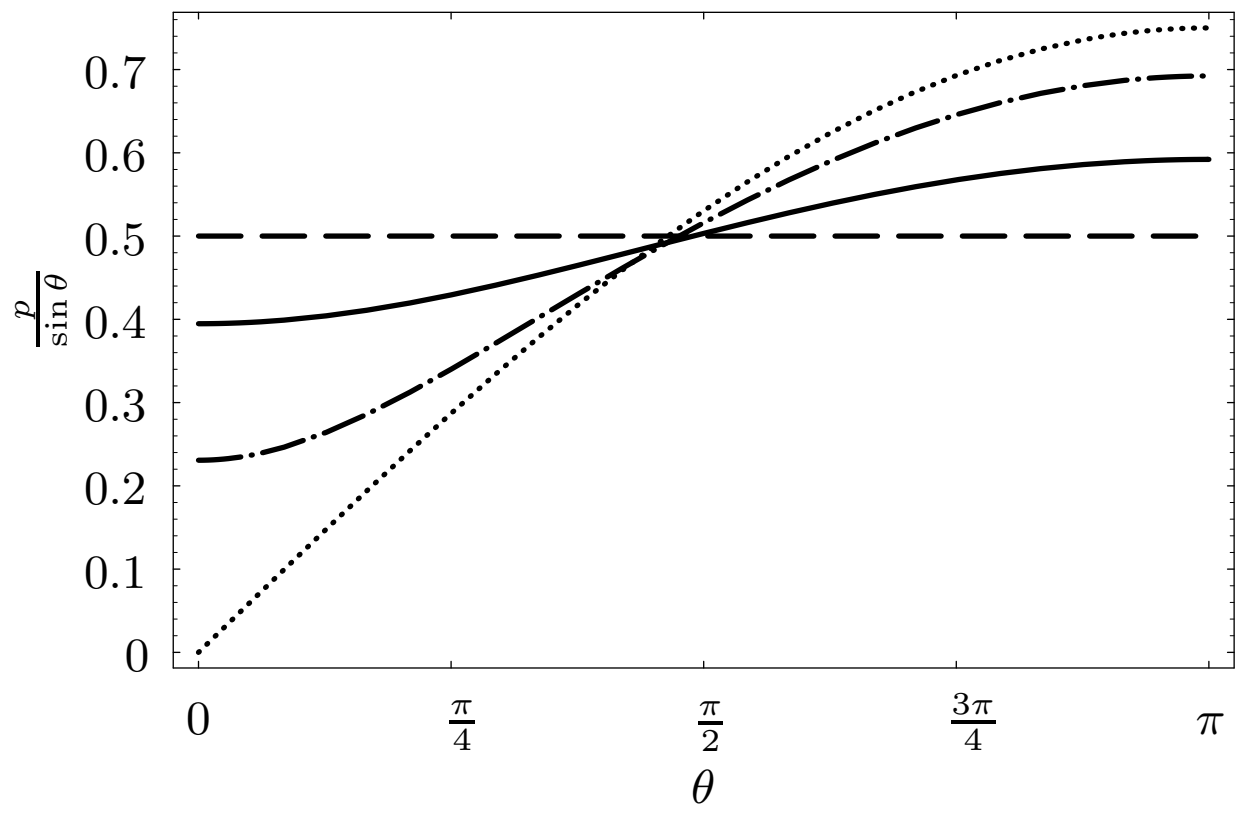

FIG. 3: Probability density of the azimuthal angle θ in the case: $v = 0$ – dashed line, $v = w$ – dotted line, $v = 5w$ or $w = 5v$ – solid line, $v = 2w$ or $w = 2v$ – dash-dotted line.

where $p_<(v,u)$ means $v < u$ and $p_>(v,u)$ means $v > u$.

In Fig. 2 we show the probability density of the sampled gas velocities for two different ion velocities in comparison to the standard Maxwell's velocity distribution function. We see that, with an increasing ion velocity, we approach the MVDF. For ion velocities of the order of gas thermal velocity w and smaller, sampled gas velocities are considerably shifted towards higher velocities (in respect to the MVDF).

Angular distribution may also be obtained from expression (18). It is easy to see that the polar angle distribution is uniform, but the azimuthal angle distribution normalized by $sin\theta$ is nonuniform. Azimuthal angular dependence for a given ion velocity v and gas velocity V is

$$p(\theta) = \frac{3vV\left(v^2 + V^2 - 2vV\cos\theta\right)^{1/2}}{(v+V)^3 - |v-V|^3}, \tag{23}$$

where $\cos\theta = \frac{\mathbf{v}\mathbf{V}}{vV}$. In Fig. 3 we see that the uniform (isotropic) normalized azimuthal angle distributions correspond to the case of zero ion velocity and also to the case when ion velocity is much higher than the thermal velocity of the background gas. In the case $v = w$ we have the highest anisotropy and angles closer to π are more probable. As ratio v/w increases or decreases angular distribution approaches the uniform case. Had we sampled the gas velocity from the gas velocity distribution function, we would have obtained uniform azimuthal distribution, since the gas velocity distribution function is uniform in the space.

IV. MIXTURES OF GASES

If the background gas of density n is a mixture of k gases with relative densities α_i, $\sum_{i=1}^{k} \alpha_i = 1$, collision frequency (2) becomes

$$\nu(v) = \sum_{i=1}^{k} \alpha_i \nu_i(v), \tag{24}$$

$$\nu_i(v) = n \iiint \sigma_i\left(|\mathbf{v}-\mathbf{u}|\right)|\mathbf{v}-\mathbf{u}|F_i(\mathbf{u})\mathrm{d}\mathbf{u}, \tag{25}$$

where $F_i(\mathbf{u})$ is the gas velocity distribution (which has the same functional form for all gas components if the background gas is in equilibrium; the difference is only in the value of the thermal velocity due to different masses) and σ_i is the ion-neutral cross section of the component i. Expression (25) can be easily calculated having in mind the previously described procedure for a pure background gas.

Probability density per unit time for collisions of ions of velocity $\mathbf{v}$ with a gas particle of velocity $\mathbf{u}$ is given by

$$p(\mathbf{v},\mathbf{u}) = \sum_{i=1}^{k} w_i \frac{n\sigma_i\left(|\mathbf{v}-\mathbf{u}|\right)|\mathbf{v}-\mathbf{u}|F_i(\mathbf{u})}{\nu_i(v)}, \tag{26}$$

$$w_i = \frac{\alpha_i \nu_i(v)}{\nu(v)}. \tag{27}$$

Sampling a uniform number in accordance to weighting factors w_i, we first determine the constituent of the mixture with which the ion of velocity v collides, and then we sample the velocity u of that constituent from the appropriate probability density [49]. It is a straightforward procedure similar to that for a single component background gas.

V. NUMERICAL RESULTS

We have developed a new Monte Carlo simulation code for ion transport in background gas in external electric field. Since the Monte Carlo procedure is described elsewhere (see e.g. [50]) we will just give the part for collision kinematics, because we have not found formulas in compact and simple form in literature valid for particle collision of arbitrary masses.

We consider two particles of masses m and M which collide. We assume that they have velocities $\mathbf{v}$ i $\mathbf{V}$, respectively with respect to the laboratory coordinate system with $\mathbf{e}_x$, $\mathbf{e}_y$ i $\mathbf{e}_z$. Assuming the momentum is conserved during collisions, the postcollision velocities are

$$\mathbf{v}' = \mathbf{v} - \frac{M}{m+M}(\mathbf{g} - \mathbf{g}'), \tag{28}$$

$$\mathbf{V}' = \mathbf{V} + \frac{m}{m+M}(\mathbf{g} - \mathbf{g}'), \tag{29}$$

where $\mathbf{g}' = g'\mathbf{e}_{g'} = \mathbf{v}' - \mathbf{V}' = \sqrt{(\mathbf{v}-\mathbf{V})^2 - \frac{2E}{\mu}}\mathbf{e}_{g'}$, $\mu = \frac{mM}{m+M}$, $\mathbf{v}_c = \frac{m\mathbf{v}+M\mathbf{V}}{m+M}$, $\mathbf{g} = \mathbf{v} - \mathbf{V}$, while E is inelastic threshold. In the case of isotropic scattering $\mathbf{e}_{g'}$ is isotropic unit vector which in simulation may be chosen using the algorithm proposed in [51].

In the case of anisotropic scattering let χ $(0 \le \chi \le \pi)$ denote azimuthal and ψ $(0 \le \psi \le 2\pi)$ polar angle of the relative particle velocity after collision with respect to the velocity before collision. While polar angle is uniform $\psi = 2\pi r$, azimuthal is obtained as a solution of the equation

$$\frac{\int_0^{\chi} \sigma(v,\chi)\sin\chi \mathrm{d}\chi}{\int_0^{\pi} \sigma(v,\chi)\sin\chi \mathrm{d}\chi} = r, \tag{30}$$

where r is uniform random number from $[0,1]$, and $\sigma(v,\chi)$ is the differential cross section. Then the postcollision velocities are

$$\mathbf{v}' = \mathbf{v} - \frac{M}{m+M}\left(\mathbf{g} + \frac{g'}{g}(\mathbf{h}\sin\chi - \mathbf{g}\cos\chi)\right), \tag{31}$$

$$\mathbf{V}' = \mathbf{V} + \frac{m}{m+M}\left(\mathbf{g} + \frac{g'}{g}(\mathbf{h}\sin\chi - \mathbf{g}\cos\chi)\right), \tag{32}$$

where $\mathbf{h}$ has components

$$h_x = \sqrt{g_y^2 + g_z^2}\sin\psi, \tag{33}$$

$$h_y = -\frac{g_x g_y \sin\psi + g g_z \cos\psi}{\sqrt{g_y^2 + g_z^2}}, \tag{34}$$

$$h_z = -\frac{g_x g_z \sin\psi - g g_y \cos\psi}{\sqrt{g_y^2 + g_z^2}}. \tag{35}$$

Equivalent expressions for the case of purely elastic scattering ($E = 0$) can be found in [50].

The code was required to pass all the benchmark test calculations that are available for the zero gas temperature. We implemented in the code the procedure for collision frequency calculation and for sampling the gas velocity as described in this paper. Number of benchmark results that could be used to test the non-zero gas temperature calculations that are available in the literature is very small. Thus we have tried to produce new values while at the same time repeating the available benchmark results.

There are several sources for benchmark calculations for ions [40, 52], but we found that only reference [53] does not use the cold gas approximation while providing a range of results that may be used to test the code.

Numerical results of simulations in case of a constant cross section, for two ion-gas mass ratios are presented in Table I. There we compare our results to the Boltzmann equation results of White et al. [53]. In case of a small ion-gas mass ratio and a constant cross section Monte Carlo simulation takes too long time because of very slow relaxation of ion transport properties (very inefficient energy transfer from ion to the gas particle in elastic scattering because of the low mass ratio), and our results are less accurate than the results for equal masses. Nevertheless, our results are in excellent agreement with the results from numerical solution of Boltzmann equation [53].

In Fig. 4 we show results from the simulation for different electric fields. We applied different samplings procedures for the background gas: from the correct formula (18) and directly from the gas velocity distribution function (which is assumed to be MVDF). One can see that thermal equilibrium (at zero field) cannot be achieved when the background velocities are not sampled in a proper way: mean ion energy is lower than the thermal energy $\frac{3}{2}kT$ and characteristic energy eD_T/μ is lower than kT.

In Fig. 5 we show results for reduced mobilities for Ar^+ ions in their parent gas using the set of cross sections from [47]. One can see that measured values at 293 K [54] are in excelent agreement with our calculated values, while measured values at 77 K [55] are slightly lower than calculated. This may indicate the need to make some small adjustments to the cross section in the low energy limit. We should mention that measurements of Basurto et al. [56] agree very well with those of Helm and with our calculations.

In Table II we tabulate the results for Ar^+ ions in their parent gas which may be used as benchmark results for verification of Monte Carlo codes or other techniques which take into account thermal effects of the background gas. We should mention that relative differences between results for two choices of parameters $m = 2$ and $m = 2.3$ [47] are less that one percent, and only the results for $m = 2$ are presented here.

VI. CONCLUSIONS

We have developed an accurate and efficient algorithm for calculations of collision frequency in case when thermal motion of background gas cannot be neglected for the case of a Maxwellian velocity distribution of the background gas particles. This is required for low energy simulations of ion transport by using a Monte Carlo technique or for implementation hybrid and in Particle in the Cell codes [44, 57]. Exact formulas are derived for very general cross section dependencies on relative velocity. Also, an analytic form of the correction terms in collision frequency was found, in the case of a large

TABLE I: Results for the ions with a hard sphere cross section model for $m_{gas} = 4\,\text{amu}$, $T = 293\,\text{K}$, $E/n = 1\,\text{Td}$, $\sigma_0 = 6 \cdot 10^{-20}\,\text{m}^2$.

	$m_{ion} = m_{gas}$		$m_{ion} = 10^{-4} m_{gas}$	
	Our results	Results from [53]	Our results	Results from [53]
ε[eV]	0.04272	0.04271	0.7332	0.73324
W [10^2ms^{-1}]	3.367	3.368	56.27	56.187
nD_L [10^{22}(ms)$^{-1}$]	0.885	0.884[a]	155	158.27
nD_T [10^{22}(ms)$^{-1}$]	0.897	0.894[a]	315	313.20
T_T [10^2K]	3.074	3.074	56.70	56.717
T_L [10^2K]	3.220	3.220	56.72	56.727

[a] Note an error of a factor 10 in the original data from the paper [53].

TABLE II: Benchmark results for Ar^+ ions in Ar for $m = 2$.

	$T = 77\,\text{K}$	$w = 179.0\,\text{ms}^{-1}$		$T = 293\,\text{K}$	$w = 349.2\,\text{ms}^{-1}$	
E/n [Td]	ε [meV]	v [ms^{-1}]	nD_L[10^{22}(ms)$^{-1}$]	ε [meV]	v [ms^{-1}]	nD_L[10^{22}(ms)$^{-1}$]
1	9.97	5.98	0.00400	37.89	4.26	0.0108
5	10.32	29.86	0.00410	38.07	21.22	0.0108
10	11.39	58.89	0.00436	38.64	42.31	0.0108
16	13.41	92.07	0.00482	39.77	67.21	0.0110
18	14.23	102.6	0.00499	40.26	75.41	0.0111
20	15.12	113.0	0.00516	40.80	83.48	0.0111
30	20.25	161.3	0.00601	44.13	122.9	0.0116
35	23.16	183.5	0.00644	46.16	141.9	0.0119
40	26.24	204.7	0.00683	48.38	160.3	0.0121
45	29.46	224.8	0.00724	50.78	178.3	0.0124
50	32.79	244.1	0.00760	53.35	195.8	0.0126
60	39.74	280.3	0.00836	58.89	229.4	0.0131
65	43.33	297.4	0.00874	61.83	245.6	0.0135
70	46.99	314.1	0.00908	64.88	261.4	0.0137
80	54.45	345.7	0.00977	71.25	291.8	0.0141
90	62.12	375.5	0.0105	77.93	321.0	0.0147
100	69.93	403.9	0.0111	84.84	348.9	0.0153
120	86.02	456.9	0.0123	99.38	401.7	0.0163
140	102.5	505.8	0.0136	114.6	450.9	0.0174
150	110.9	529.1	0.0141	122.5	474.4	0.0178
160	119.3	551.5	0.0146	130.4	497.2	0.0184
200	153.9	635.5	0.0168	163.4	582.8	0.0202
300	244.4	816.0	0.0216	250.9	767.2	0.0246
350	291.1	895.2	0.0239	296.7	848.4	0.0267
400	338.8	969.5	0.0260	343.6	924.2	0.0288

ratio of ion - gas thermal velocities. It was emphasized that sampling of the gas velocity for a given ion velocity (in Monte Carlo simulation) should be done by using appropriate probability of collisions. Explicit analytic formulas are calculated in the case of a constant cross section, and it was shown that the effective velocity distribution function of the gas particles, which collide with an ion of a given velocity, is significantly different from a Maxwellian. Results of our Monte Carlo simulation for ion transport are in excellent agreement with the numerical solution of Boltzmann equation and may be used as a benchmarks for ion transport properties.

In recent literature there has been a greater tendency to represent ionic motion by a more complex model than the basic Langevin theory. Nanbu and coworkers have defined theory in terms of collision probabilities [58, 59, 60]. It may be worth the effort to include the presently proposed technique together with their approach, especially since that theory is normalized by using the mobilities which are usually available only in the thermal limit or close to it.

It is worth noting that so far very accurate numerical techniques for solutions to the Boltzmann equation have been used to study ion transport [61, 62, 63]. Application of Monte Carlo simulations for ions have not been as widespread for ions as it was for electrons. This to some degree is due to the problems in representing thermal collisions which are important over a much broader range of E/n. The present technique has already been applied in simulations of the transport of thermal ions

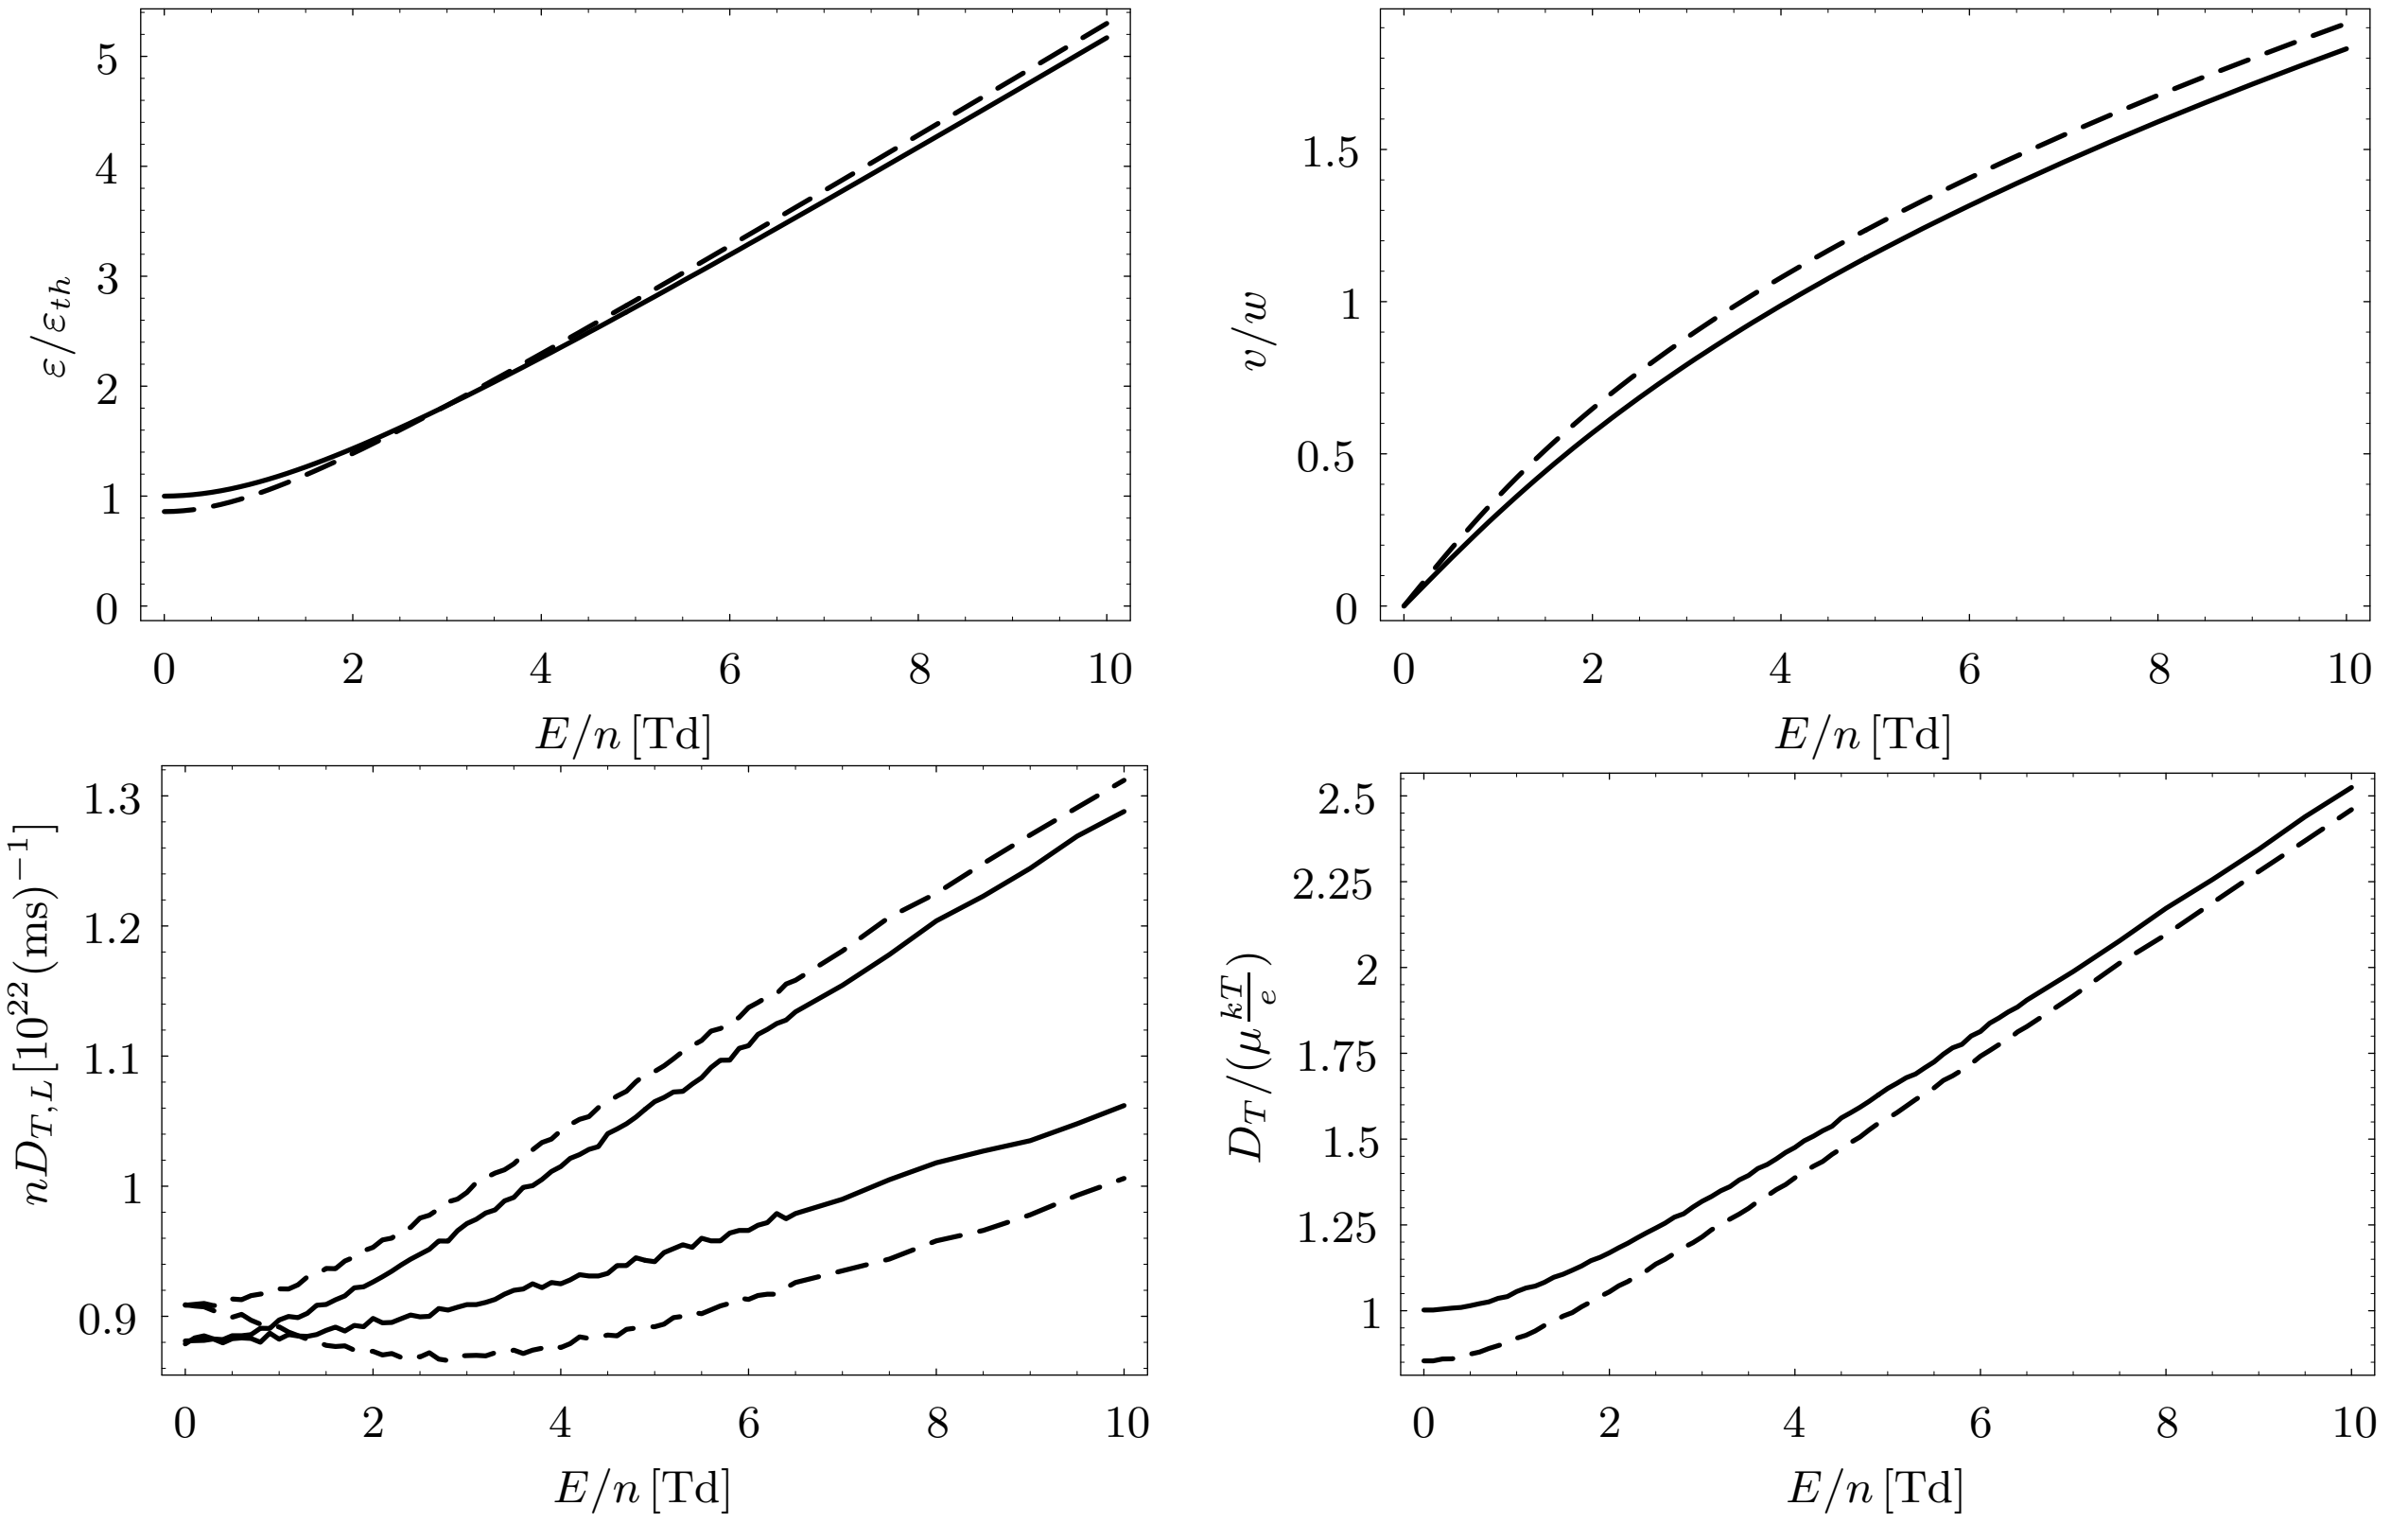

FIG. 4: Mean ion energy, drift velocity, longitudinal and transverse diffusion coefficient and transverse diffusion coefficient over mobility as a function of reduced electric field for a hard sphere model for $m_{ion} = m_{gas} = 4\,\mathrm{amu}$, $T = 293\,\mathrm{K}$, $\sigma_0 = 6 \cdot 10^{-20}\,\mathrm{m}^2$ for different sampling procedures of velocity of background gas: from (18) – solid line; from MVDF – dashed line.

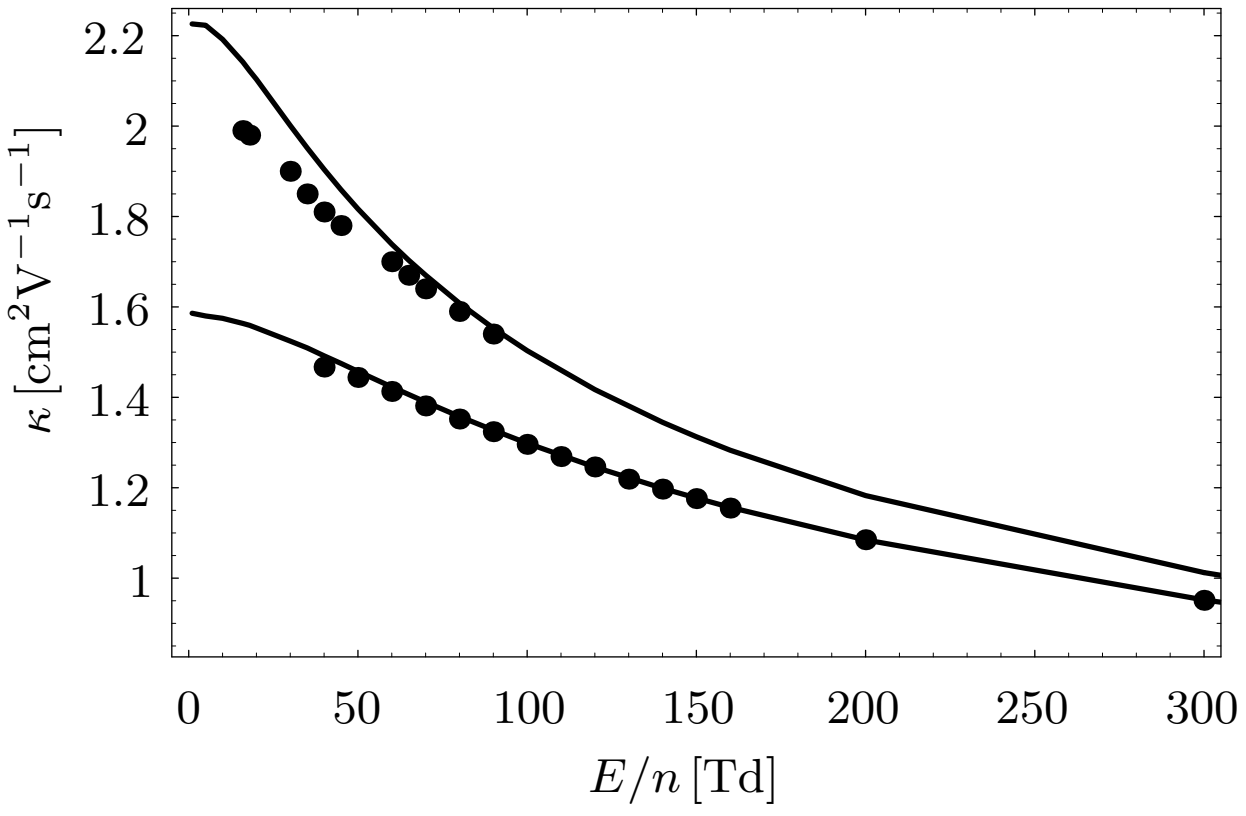

FIG. 5: Calculated reduced mobilities of Ar^+ ions in Ar at 77 K (upper curve) and 293 K (lower curve). By dots are given experimental results from [54, 55].

[36, 64]. At the same time the Boltzmann techniques mostly use interaction potentials to communicate the results to the scientific community. While it is possible to convert those to the cross sections it is difficult to standard modelers of plasmas to appreciate the applicability of certain sets of initial data over a wide range of mean energies and values of E/n. Thus it seems better to apply Monte Carlo simulations to convert the transport data to cross sections as such codes may be directly compatible with plasma models or even more so directly applicable to build hybrid models that treat ion transport by MC simulations [32, 37, 38, 39, 65, 66]. The present technique enables such application at a high level of accuracy without worrying about the effecs of thermal collisions on the determination of collision frequencies. It is also foreseeable that a similar implementation would be required for fast neutrals [65, 66]. Just how big the effects of the inadequate sampling of collision frequency on plasma modeling are it is still not certain. Yet the procedure is simple enough that if once implemented it may serve as the basis for hybrid or kinetic codes (MC section of PIC codes) that would leave little room to worry about the implementation of proper technique and at the same time it would not burden the code.

Acknowledgments

Work on this paper was supported by MNTRS 141025. The authors are grateful to S. Vrhovac and M. Šuvakov for discussions of this problem and useful suggestions.

APPENDIX A

Consider an integral of the form

$$I=\frac{1}{\sqrt{\pi}w}\int_{-\infty}^{+\infty}f(x)\exp\left[-\frac{(x-v)^2}{w^2}\right]\mathrm{d}x. \tag{A1}$$

Let $f(x)$ be a function which is continuous and repeatedly differentiable at $x=v$, and furthermore the integral in (A1) converges. We transform this integral by the substitution $t=\frac{x-v}{w}$:

$$I=\frac{1}{\sqrt{\pi}}\int_{-\infty}^{+\infty}f(v+wt)\exp\left[-t^2\right]\mathrm{d}t. \tag{A2}$$

After expanding the function $f(v+wt)$ into Taylor series

$$f(v+wt)=\sum_{n=0}^{\infty}\frac{(wt)^n}{n!}f^{(n)}(v), \tag{A3}$$

using the formula

$$\int_{-\infty}^{+\infty}t^{2n}\exp\left[-t^2\right]\mathrm{d}x=\Gamma(n+\frac{1}{2}), \tag{A4}$$

we obtain the final formula

$$I=\sum_{n=0}^{\infty}\frac{(w)^{2n}}{4^n n!}f^{(2n)}(v). \tag{A5}$$

In the limit of vanishing w, the integral (A1) can be calculated directly using representation of delta function

$$\delta(v)=\frac{1}{\sqrt{\pi}}\lim_{w\to 0}\frac{\exp\left[-\frac{v^2}{w^2}\right]}{w}. \tag{A6}$$

When one wants to calculate an integral of the form

$$I'=\frac{1}{\sqrt{\pi}w}\int_{0}^{+\infty}f(x)\exp\left[-\frac{(x-v)^2}{w^2}\right]\mathrm{d}x \tag{A7}$$

the situation is different. It is hard to obtain a general formula for integral I', but it is possible to calculate it in cases when the condition $v\gg w$ holds. In that case main contribution to I' comes from points x which are in vicinity of v, so the lower limit in integral (A7) can be replaced by minus infinity, and I' is equal to the integral I up to the exponentially vanishing term:

$$I'=I+\mathcal{O}\left(Exp\left[-\frac{v^2}{w^2}\right]\right). \tag{A8}$$

---

[1] D. L. Flamm, J. Vac. Sci. Technol. A **4**, 729 (1986).

[2] R. A. Gottscho, C. W. Jurgensen, and D. J. Vitkavage, J. Vac. Sci. Technol. B **10**, 2133 (1992).

[3] F. Tochikubo, Z. L. Petrović, S. Kakuta, N. Nakano, and T.Makabe, Jpn. J. Appl. Phys. **33**, 4271 (1994).

[4] T. Nakano and S. Samukawa, J. Vac. Sci. Technol. A **17**, 686 (1999).

[5] B. Abraham-Shrauner, J. Vac. Sci. Technol. B **17**, 158 (1999).

[6] T.Makabe and Z. Petrović, *Plasma Electronics: Applications in Microelectronic Device Fabrication* (Taylor and Francis - CRC Press, New York, 2006).

[7] M. A. Lieberman and A. J. Lichtenberg, *Principles of Plasma Discharge and Materials Processing* (Wiley Hoboken, 2005).

[8] V. Nagorny and P. Drallos, Plasma Sources Sci. Technol. **6**, 212 (1997).

[9] C. Punset, J. P. Boeuf, and L. Pitchford, J. Appl. Phys. **83**, 1884 (1998).

[10] S. Uchida, H. Sugawara, Y. Sakai, T. Watanabe, and B. H. Hong, J. Phys. D: Appl. Phys. **33**, 62 (2000).

[11] G. J. M. Hagalaar, G. M. W. Kroesen, and M. H. Klein, J. Appl. Phys. **88**, 2240 (2000).

[12] R. E. J. Sladek and E. Stoffels, J. Phys. D: Appl. Phys. **38**, 1716 (2005).

[13] S. Živković, N. Puač, Z. Giba, D. Grubišić, and Z. L. Petrović, Seed Sci. Technol. **32**, 693 (2004).

[14] B. N. Khare, P.Wilhite, and M. Meyyappan, Nanotechnology **15**, 1650 (2004).

[15] Z. Shen, U. Kortshagen, and S. A. Campbell, J. Appl. Phys. **96**, 2204 (2004).

[16] Z. L. Petrović, M. Radmilović-Radjenović, G. Malović, N. Puač, M. Radetić, and P. Jovančić, in *Proc. 1st International Workshop on Nanoscience and Nanotechnology IWON, Belgrade* (2005), p. 23.

[17] C. D. Pintassilgo, K. Kutasi, and J. Loureiro, Plasma Sources Sci. Technol. **16**, S115 (2007).

[18] R. H. Stark and K. H. Schoenbach, J. Appl. Phys. **85**, 2075 (1999).

[19] A. H. Mohamed, R. Block, and K. H. Schoenbach, IEEE Trans. Plasma Sci. **30**, 182 (2002).

[20] T. Ito and K. Terashima, Appl. Phys. Lett. **80**, 2854 (2002).

[21] C. J. Wagner, N. P. Ostrom, S. J. Park, J. Gao, and J. G. Eden, IEEE Trans. Plasma Sci. **30**, 194 (2002).

[22] M. J. Kushner, W. Z. Collison, M. J. Grapperhaus, J. P. Holland, and M. S. Barnes, J. Appl. Phys. **80**, 1337 (1996).

[23] K. Maeshige, M. Hasebe, Y. Yamaguchi, and T. Makabe, J. Appl. Phys. **88**, 4518 (2000).

[24] R. E. Robson, R. D. White, and Z. L. Petrović, Rev. Mod. Phys. **77**, 1303 (2005).

[25] N. Nakano, N. Shimura, Z. Petrović, and T. Makabe, Phys. Rev. E **49**, 4455 (1994).

[26] J. P. Boeuf, Phys. Rev. A **36**, 2782 (1987).

[27] J. P. Boeuf and L. C. Pitchford, IEEE Trans. Plasma Sci. **19**, 286 (1991).

[28] Z. Donkó, Phys. Rev. E **57**, 7126 (1998).

[29] M. Surendra, D. B. Graves, and G. M. Jellum, Phys. Rev. A **41**, 1112 (1990).

[30] P. L. G. Ventzek, T. J. Sommerer, R. J. Hoekstra, and M. J. Kushner, Appl. Phys. Lett. **63**, 605 (1993).

[31] Z. Donkó, J. Appl. Phys. **88**, 2226 (2000).

[32] Z. Donkó, Phys. Rev. E **64**, 026401 (2001).

[33] A. Bogaerts, R. Gijbels, and W. Goedheer, Jpn. J. Appl. Phys. **38**, 4404 (1999).

[34] M. J. Kushner, J. Appl. Phys. **54**, 4958 (1983).

[35] Z. L. Petrović, S. Bzenić, J. Jovanović, and S. Djurović, J. Phys. D: Appl. Phys. **28**, 2287 (1995).

[36] Z. L. Petrović, Z. Raspopović, J. Jovanović, V. Stojanović, G. Malović, T. Makabe, and J. de Urquijo, Appl. Surf. Sci. **253**, 6619 (2007).

[37] V. Georgieva, A. Bogaerts, and R. Gijbels, J. Appl. Phys. **93**, 2369 (2003).

[38] V. Georgieva, A. Bogaerts, and R. Gijbels, Phys. Rev. E **69**, 026406 (2004).

[39] D. Marić, P. Hartmann, G. Malović, Z. Donkó, and Z. L. Petrović, J. Phys. D: Appl. Phys. **36**, 2639 (2003).

[40] Z. L. Petrović and V. D. Stojanović, J. Vac. Sci. Technol. A **16**, 329 (1998).

[41] J. V. Jovanović, S. B. Vrhovac, and Z. L. Petrović, Eur. Phys. J. D **21**, 335 (2002).

[42] S. Longo and P. Diomede, Eur. Phys. J. Appl. Phys. **26**, 177 (2004).

[43] S. Robertson and Z. Sternovsky, Phys. Rev. E **67**, 046405 (2003).

[44] C. K. Birdsall, IEEE Trans. Plasma Sci. **19**, 65 (1991).

[45] V. Vahedi and M. Surendra, Com. Phys. Comm. **87**, 179 (1995).

[46] K. Nanbu and G. Wakayama, Jpn. J. Appl. Phys. **38**, 6097 (1999).

[47] A. V. Phelps, J. Appl. Phys. **76**, 747 (1994).

[48] M. Yousfi and A. Hennad, Phys. Rev. E **49**, 3264 (1994).

[49] L. Devroye, *Non-Uniform Random Variate Generation* (Springer-Verlag, New York, 1986).

[50] K. Nanbu, IEEE Trans. on Plasma Sci. **28**, 971 (2000).

[51] R. E. Knops, CACM **13**, 326 (1970).

[52] H. R. Skullerud, J. Phys. B: Atom. Molec. Phys. **6**, 728 (1973).

[53] R. White, R. E. Robson, and K. F. Ness, Com. Phys. Comm. **142**, 349 (2001).

[54] H. Helm and M. T. Elford, J. Phys. B: Atom. Molec. Phys. **10**, 3849 (1977).

[55] H. Helm and M. T. Elford, J. Phys. B: Atom. Molec. Phys. **11**, 3939 (1978).

[56] E. Basurto, J. de Urquijo, I. Alvarez, and C. Cisneros, Phys. Rev. E **61**, 3053 (2000).

[57] C. K. Birdsall, E. Kawamura, and V. Vahedi, in *in Electron Kinetics and Application of Glow Discharges, edited by U. Kortshagen, L.D. Tsendin, NATO ASI series Physics (Plenum Press, New York)* (1998), vol. 367, p. 59.

[58] K. Nanbu and Y. Kitatani, J. Phys. D: Appl. Phys. **28**, 324 (1995).

[59] K. Denpoh and K. Nanbu, J. Vac. Sci. Technol. A **16**, 1201 (1998).

[60] L. Tong and K. Nanbu, Jpn. J. Appl. Phys. p. L918 (2005).

[61] A. Koutselos, E. Mason, and L. Viehland, J. Chem. Phys. **93**, 7125 (1990).

[62] L. Viehland and C. Kirkpatrick, Chem. Phys. **202**, 285 (1996).

[63] E. Mason and E. McDaniel, *Transport Properties of Ions in Gases* (Wiley-Interscience Publication, New York, 1988).

[64] Z. L. Petrović, J. V. Jovanović, V. Stojanović, Z. Raspopović, and Z. Ristivojevic, Eur. Phys. J. D,accepted for publication (2008).

[65] Z. Donkó, P. Hartmann, and K. Kutasi, J. Phys.: Conference Series **71**, 012008 (2007).

[66] Z. Donkó, P. Hartmann, and K. Kutasi, Plasma Sources Sci. Technol. **178**, 15 (2006).